

First in Quality. Built to **Last**.

SB-2EX

SIDE BELT CASE TAPER

MAXIMUM UPTIME


Eastey's SB-2EX Case Taper offers the quality that you have come to rely on from Eastey. The system's unique and simple design has proven to be one of the most reliable case tapers on the market today, keeping production and maintenance efforts to a minimum and providing fast and efficient alternatives to hand taping.

WIDE STANDARD CASE RANGE

The SB-2EX's side belts are great for light or heavy weight, narrow or small boxes. It is ideal for void-fill cases where the packaged product does not support the box.

INDUSTRIAL STRENGTH OPERATION

Dual 1/4 hp drive motors, aggressive industrial strength drive belts, and roller tables make SB-2EX a workhorse that will stand up to your toughest challenges. Each case taping machine is made from 12 gauge steel that will withstand even the most rugged applications. A powder coated exterior protects the machine from abusive conditions and guarantees years of use. Best of all, the SB-2EX is CE certified, so users can be confident it will consistently provide reliable, high quality case sealing.

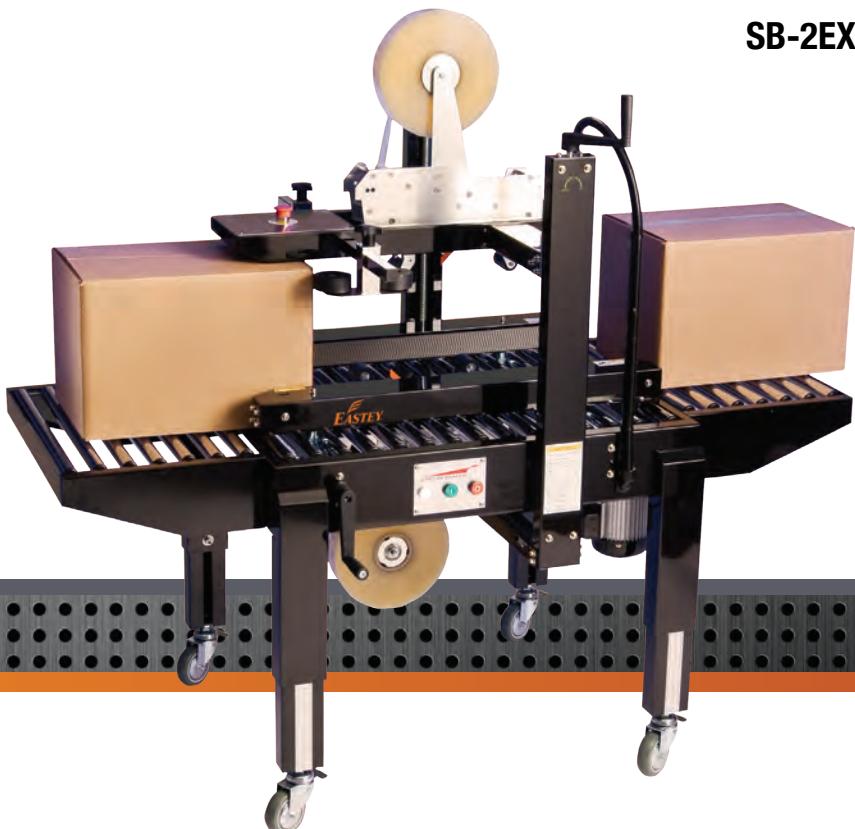

WIDE STANDARD CASE RANGE

The SB-2EX's side belts are great for light or heavy weight, narrow or small boxes. It is ideal for void-fill cases where the packaged product does not support the box.

PRODUCTION MEETS VERSATILITY

SB-2EX offers fast and easy case changes with adjustable side rails and flexibility for boxes 5" long and greater. Adjustments can be made on the fly with easy hand tighten knobs and cranks which can be attached to either side of the machine. SB-2EX utilizes easy to load top and bottom tape cartridges and will seal boxes as narrow as 4.0" wide and as low as 4.0" tall.



CASE TAPING MADE EASY

SB-2EX is designed and built with the customer in mind. Top and bottom tape cartridges are interchangeable and designed for easy tape threading. These machines accept 2" wide pressure-sensitive tape as a standard, or can be converted in the field with 3" tape heads for wider case taping applications. Operators can learn to use Eastey's SB-2EX case taping machine in minutes, avoiding breaks in production and downtime, saving your company money and increasing your ROI.

THE RIGHT SOLUTION

Rugged design. Proven reliability. Simple operation. Your benefits go on and on. When it comes to industrial operation, rely on Eastey to provide the right solution for your case sealing needs.

SB-2EX SIDE BELT CASE TAPER

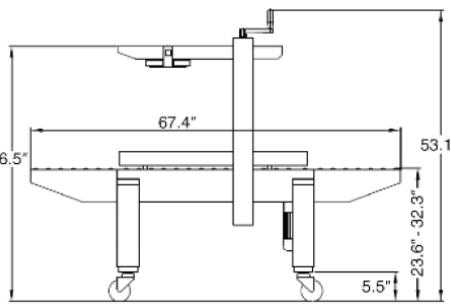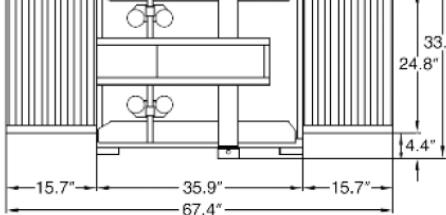

1. Top and bottom tape heads are interchangeable and are designed for easy threading
2. Industrial strength roller beds move boxes consistently through the taper
3. Adjustable side rails and tape head offer fast and easy case changes
4. Top and bottom tapeheads are identical and can be removed instantly without tools. Choose from two options.

SB-2EX FEATURES	SB-2EX TAPING SPECIFICATIONS		
• Plug-in and go operation	Sealer Type	Side belt, top and bottom case sealer	
• Fast and easy box size changes	Machinery Makeup	Industrial strength 12 gauge steel, powdered coated for durability	
• Industrial strength side belts	Belt Speed	75 fpm	
• Interchangeable top and bottom tape cartridges	Tape Speed	30 cases per min., depending on box size and operator efficiency	
• Emergency stop button	Conveyor Height Adj.	18.1" to 32.3"	
• Adjustable leg extensions	BOX SPECIFICATIONS		
• Casters for transportation within plant	Minimum Box Size	Length	Width
• Front and rear pack tables to allow for case packing	Maximum Box Size	Infinite	19.5"
• Top squeezers push top flaps together for accurate case sealing	Tape Size	2" wide pressure sensitive tape, up to 15" diameter rolls, optional 3" wide tape	
• Powder coated 12 gauge steel	Tape Cartridge	Proven design requires no lubrication, designed for simple tape threading, removable for maintenance and interchangeable with top or bottom cartridges	
• Low maintenance, no air required	Drive Motor	Two (2) 1/4 HP drive motors	
	Electrical Requirements	110 VAC, 60Hz, 4.0A	
	Agency Approvals	CE Certification	

SB-2EX OPTIONAL ACCESSORIES	
3" Tape Head	Accepts 3" wide tape rolls
Stainless Finish	Complete stainless finish to meet specific application requirements